



# JTS®


## JSCBJ300 / JSCBJ707 Dot Sight OPERATING INSTRUCTIONS

**IMPORTANT** This manual contains important information about your dot sight. This manual should always accompany the dot sight in case ownership should change. Always follow firearm safety rules as outlined by the firearm's manufacturer. Keep this dot sight and all firearm related products secured and away from children or other unauthorized users.

**⚠ WARNING** Do not look at the sun through a dot sight as it may cause permanent damage to your eye and/or vision.







**⚠ WARNING** Before installing or removing your JTS dot sight, remove the magazine from the firearm. Then visually check that the chamber and action are clear of ammunition.

### MODEL JSCBJ707

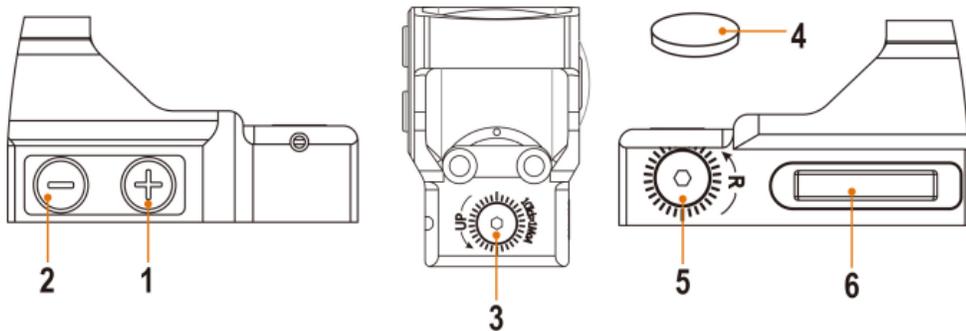

1. Power, ON/OFF, brightness (+)
2. Power, ON/OFF, brightness (-)
3. Elevation adjustment (1 MOA)
4. CR2032 battery
5. Windage adjustment (1 MOA)
6. Battery compartment
7. (2) Mounting screws #6-32
8. M1913 rail mount
9. Mount tension screw

## MODEL JSCBJ300

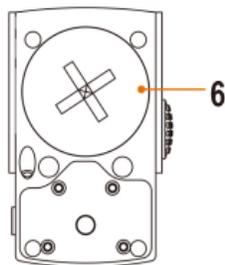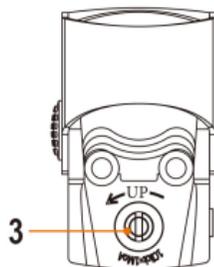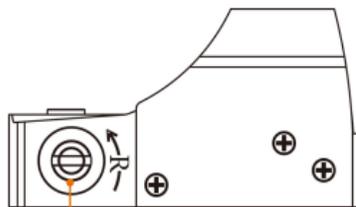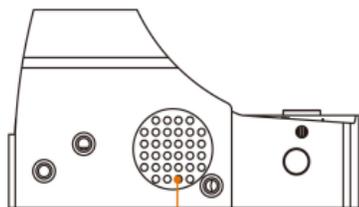

3

## **QUICK START**

- **Power On:** With a battery installed, press and hold the (1) brightness adjustment button. This will turn on the sight to the last, used level of intensity.
- **Power Off:** To turn off the sight, press and hold the (1) brightness adjustment button for four seconds.



## **FEATURES AND SPECIFICATIONS**

- **Brightness:** The JTS JSCBJ300 dot sight and the JTS JSCBJ707 dot sight are adjustable for eight levels of brightness. Pressing the (1) button will increase the brightness a single step until the maximum level has been reached. Pressing the (2) will decrease the reticle brightness until the minimum level has been achieved.
- **Auto Off:** Your JTS dot sight is equipped with an intelligent power save feature to prolong the life of your battery when not in use. After 1 hour without adjustment, the JTS JSCBJ300 sight will shut off. After 3 hours without adjustment, the JTS JSCBJ707 sight will shut off. Pressing either of the brightness adjustment buttons will wake up the sight to the previously used brightness level.
- **Aiming Dot:** Your JTS dot sight has a 3.5 MOA round dot for precision aiming. This reticle is approximately 1.8" in diameter at 50 yards, depending on brightness and ambient conditions.
- **Battery:** Your JTS dot sight is powered by a single CR2032 battery. Battery life may vary, depending on reticle intensity, environmental conditions and use.

**⚠ WARNING** Confirm that your dot sight is securely and properly installed. An improperly installed sight could become detached during recoil causing injury.

## INSTALLATION AND MOUNTING

Your JTS dot sight is intended for use on rifles and shotguns equipped with M1913 Picatinny rails. Using the (2) included mounting screws, attach the JTS dot sight to the included mount. Place the sight assembly on the desired location of the firearm and tighten the cross bolt to secure it in place.

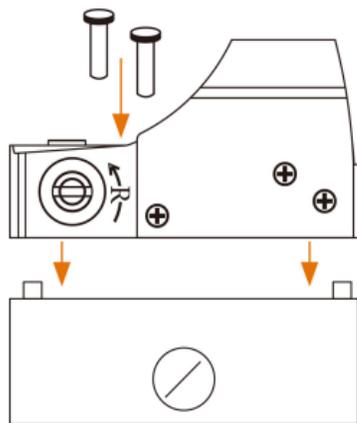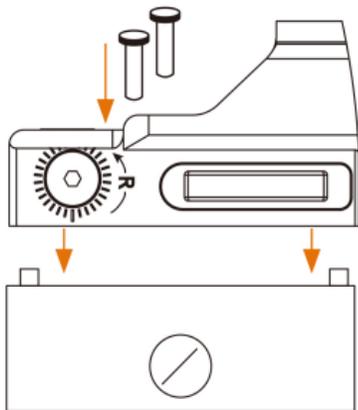

## WINDAGE AND ELEVATION ADJUSTMENTS

Your JTS dot sight is fully adjustable for both windage and elevation. The adjustment screws are located on the top and right side of the sight body. Each click represents 1 MOA (Approx. 0.5" at 50 yards) of adjustment

ELEVATION ADJUSTMENT		WINDAGE ADJUSTMENT	
Down*	Clockwise 	Left*	Clockwise 
Up*	Counter-Clockwise 	Right*	Counter-Clockwise 

\*Point of Impact

**NOTICE** When adjusting both the windage and elevation buttons, reference your Point of Impact (POI). If your point of impacts are below your point of aim, turn the dial UP to reach zero.

**⚠ WARNING** KEEP BATTERIES AWAY FROM CHILDREN. THERE IS A CHEMICAL BURN HAZARD ASSOCIATED WITH BATTERIES. IF A NEW OR USED LITHIUM BUTTON/COIN CELL BATTERY IS SWALLOWED OR ENTERS THE BODY, IT CAN CAUSE SEVERE INTERNAL BURNS AND CAN LEAD TO DEATH IN AS LITTLE AS 2 HOURS. ALWAYS COMPLETELY SECURE THE BATTERY COMPARTMENT. IF THE BATTERY COMPARTMENT DOES NOT CLOSE SECURELY, STOP USING THE PRODUCT, REMOVE THE BATTERIES, AND KEEP IT AWAY FROM CHILDREN. IF YOU THINK BATTERIES MIGHT HAVE BEEN SWALLOWED OR PLACED INSIDE ANY PART OF THE BODY, SEEK IMMEDIATE MEDICAL ATTENTION.

## REVIEWING BATTERY SAFETY

- When used correctly, batteries provide a safe and dependable source of portable power. However, misuse or abuse may result in leakage, fire, or explosion.
- Batteries can explode or leak and cause burns if installed backwards, disassembled, charged, or exposed to water, fire or high temperature.
- Always install your batteries correctly, observing the “+” and “-” marks on the battery and the device.
- Always replace the whole set of batteries at one time. Do not to mix old and new batteries, or batteries of different types.

- Store unused batteries in their original packaging and away from metal objects that may short-circuit them.
- Remove discharged batteries from equipment promptly to avoid possible damage from leakage.
- The batteries are supplied in a charged state, and are not designed for recharging. Recharging may cause leakage, fire, or explosion.

## REPLACING THE BATTERY

The battery is located in the compartment on the side of the dot sight (7). Your dot sight has an illumination adjustment which is powered by one 3V lithium battery (CR2032) or equivalent. If your dot grows dim or does not illuminate, you will need to replace the battery. To install or remove the battery, open the battery compartment and insert a new battery (+) side up. Then close the battery compartment.

### NOTICE

Always remember to turn off the power when the optic is not in use.

**NOTE:** Batteries must not be put in the household waste. Dispose of them properly, hand them in at your local shop for disposal or take them to a used battery collection location. Please recycle used batteries.



## **MAINTENANCE**

When not in use, your JTS dot sight should be kept in a clean, dry and ventilated place away from any corrosive material. Never try to take the dot sight apart or clean it internally. Lens surfaces may be cleaned with bursts of air, a lens brush, or the included microfiber cloth. Your JTS dot sight requires minimal maintenance, the included CR2032 battery should provide years of service for most users. If your sight should fail to power up, remove and replace the battery with a new CR2032 from a reputable manufacturer.

## **SERVICE**

Do not return defective or damaged product to the dealer. If your dot sight needs repair, call JTS (281) 647-9130 and ask for the Service Department or visit [www.jtsgroup.us](http://www.jtsgroup.us). **DO NOT ATTEMPT TO DISASSEMBLE IT!** Your dot sight requires special tools and fixtures to repair it. Any disassembly or modification not performed by JTS will void the warranty.

**DO NOT RETURN THIS PRODUCT TO THE STORE:** If you have any questions or concerns about JTS Group, Inc. products, please contact us at (281) 647-9130 or visit [www.jtsgroup.us](http://www.jtsgroup.us) and one of our service techs will be glad to assist you.

## **LIMITED LIFETIME WARRANTY**

This product is warranted to the retail consumer for the life of the scope against defects in material and workmanship and is not transferable.

**WHAT IS COVERED:** Replacement parts and labor.

**WHAT IS NOT COVERED:** Shipping charges to JTS Group for defective product

and damages caused by abuse or failure to perform normal maintenance as well as any other expense. Consequential damages, or incidental expenses, including damage to property. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**WARRANTY CLAIMS:**

If your JTS product is found to have defects in materials or workmanship, we will repair or replace it free of charge for the lifetime of the product. This warranty does not apply to owner neglect or abuse of the product. Simply ship your scope to the address below with an enclosed note indicating the problem you are having as well as your contact information.

**JTS Group, Inc.  
7724 Cherokee St  
Katy, TX 77494  
Phone: (281) 647-9130**

**IMPLIED WARRANTIES:** Any implied warranties, including the implied warranties of merchantability and fitness for a particular purpose, are limited in duration to the life of the optic. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. TO THE EXTENT ANY PROVISION OF THIS WARRANTY IS PROHIBITED BY FEDERAL, STATE, OR MUNICIPAL LAW; WHICH CANNOT BE PREEMPTED, IT SHALL NOT BE APPLICABLE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE AND COUNTRY TO COUNTRY.

<b>SPECIFICATIONS</b>	<b>JSCBJ707</b>	<b>JSCBJ300</b>
<b>Reticle Type</b>	<b>3 MOA dot</b>	<b>3.5 MOA dot</b>
<b>Color</b>	<b>Red</b>	
<b>Reticle Brightness</b>	<b>1-8 and OFF</b>	
<b>Magnification</b>	<b>1x</b>	
<b>Eye Relief</b>	<b>Unlimited</b>	
<b>MOA Adjustment</b>	<b>1 MOA</b>	
<b>Finish</b>	<b>Black Anodized Aluminum</b>	
<b>Mount</b>	<b>Weaver / Picatinny</b>	
<b>Click Value</b>	<b>1 Click = 1 MOA</b>	
<b>Coating</b>	<b>Fully Multi Coated</b>	
<b>Length</b>	<b>48 mm / 1.9 in.</b>	
<b>Weight</b>	<b>65 g / 2.3 oz</b>	<b>77 g / 2.7 oz</b>



**JTS<sup>®</sup>**

We reserve the right to make design changes, color changes and technical improvements. No responsibility is accepted for printing errors or incorrect information.

**Distributed by JTS Group, Inc.  
7724 Cherokee St  
Katy, TX 77494  
[www.jtsgroup.us](http://www.jtsgroup.us)**